

RDA ResetFactory Tool User Guide

Catalog

1. Interface Description.....	3
1.1 Main User Interface	3
2. Operation Guide.....	4
2.1 Quick Start Guide	4
2.2 Instruction of production and test	5
2.2.1 Illustration of COM Mode	5
2.3 Language Setting	5

1.Interface Description

1.1 Main User Interface

Run resetFactory.exe program, the main interface of program is shown as Figure1-1.

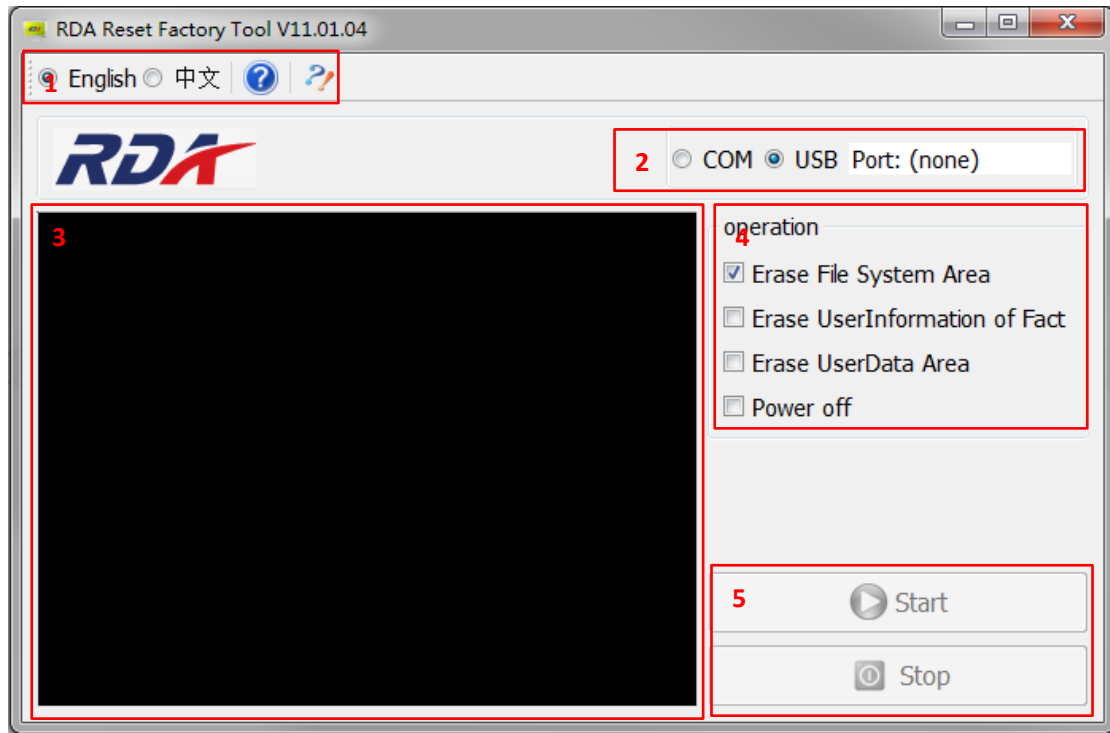


Figure 1-1 Main user interface of Resetfactory tool

Description of the elements in the main interface is displayed in Table 1-1:

Table 1-1 Description of the elements in the main interface

Icons	Description
1	Language setting, help and about button
2	Port select
3	Information output widget
4	Operations of erase system file/user information/user data
5	Start/Stop button

2. Operation Guide

2.1 Quick Start Guide

1. Running

Run ReadStaion.exe. The main interface is shown as Figure 1-1.

2. Connection mode select

Click USB/COM button on the interface change to the COM connection mode. The port name will automatically display on the port button after the mobile phone successfully connected.

3. Choose option

Select different check box to choose different option of erase file system area, erase user information of factory, erase user data area and power off.

4. Start program

Click start button on main interface, and start relevant program. The information box output information during the read process, as showed in Figure 2-1.

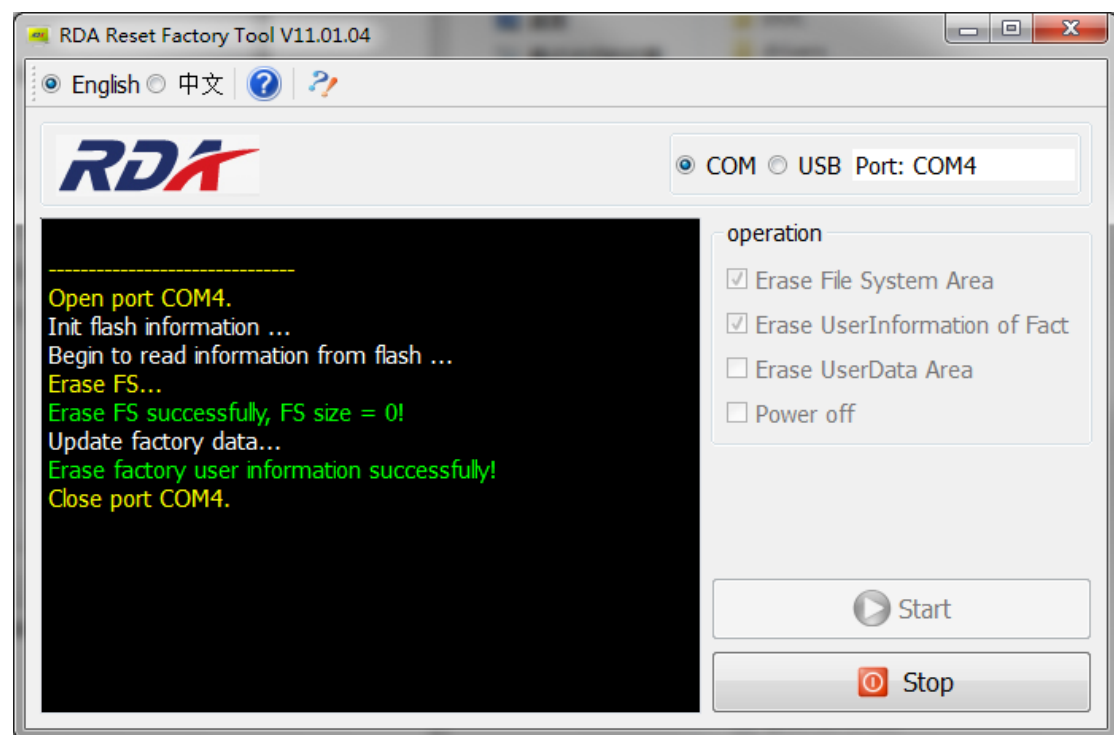


Figure 2-1 Result of reset factory

- ✚ This tool support continuous plug operation. Program can auto start when plug in a new device. And can be stopped only when the “Stop” button is clicked.

2.2 Instruction of production and test

2.2.1 Illustration of COM Mode

If the COM mode is used, it needs to connect the phone to PC using USB serial device, and the battery powered is required. Hold down the power button until the screen is lighted up. Make sure to start when the screen is lit.

Note: The COM range is 0 ~ 255. If the port is out of the prescribed scope, such as COM366, please select the port again.

2.3 Language Setting

Switch to Chinese / English through the button

